



PT. Bright Spark Indonesia

- Corrosion Prevention & Cathodic Protection
- Jetty Repair & Restoration
- Floating Pontoon



Komp Prima Center 2 Blok E No.3
Jl. Pesing Poglar Pool PPD
Jakarta Barat 11710 - Indonesia
☎ +62 21 29030968
☎ +62 21 29030950
🌐 www.brightsparkindonesia.com
✉ cs@brightsparkindonesia.com

Floating Breakwater

Raw material : HDPE , Proof UV
Dimension: :77*77*50cm(LxWxD)
Weight: 36LBS hollow middle
Diameter:31.75mm
Outside diameter:50mm
Available colors:White/Red(other
color can be customized if big
quantity)


Floating Breakwater Accessories & Connection

The structures can be
constructed with embedded
galvanized or stainless steel
cable or rods, up to 25mm
diameter, inside connecting
45mm EPDM rubber cables.

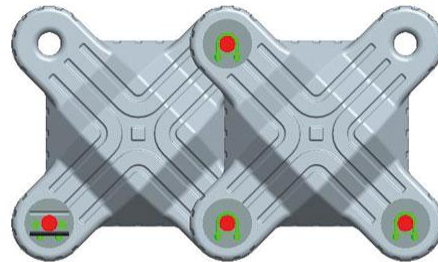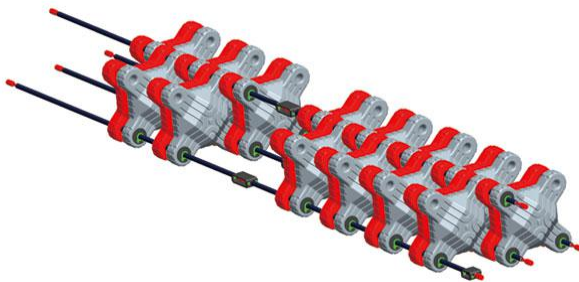

Application:

We developed the floating articulated breakwater technology to afford protection to ports, harbors, marinas, beaches, and private property subject to destructive or annoying wave/wake forces. There are three primary configurations of the floating breakwater: Ocean Floating 2 Layers, 3 Layers

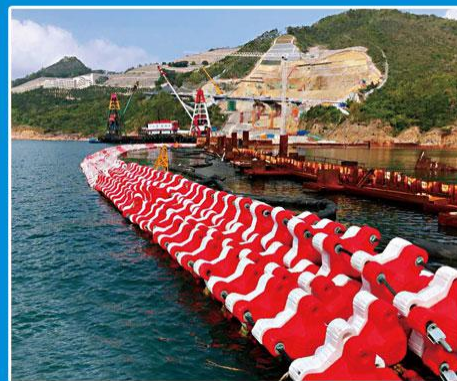

Golden Certification



Golden Certification



Golden Certification

